


FIBERROAD

LAYER 2+ MANAGED INDUSTRIAL PoE Switch

Product Data Sheet

Ver. 2.0


Fiberroad Technology Co., Limited



The L2+ Managed Industrial PoE Switch is a groundbreaking innovation in the field of industrial networking. With its 8-Port 10/100/1000Base-TX RJ45 Ports and 2/4 Gigabit SFP Port, this switch offers exceptional stability and reliability for Ethernet transmission. Whether it's in factories, outdoor environments, or any other demanding setting, this new generation switch has proven its mettle time and again. The eight RJ45 ports ensure seamless connectivity with various devices, while the two/four SFP (Small Form-Factor Pluggable) ports enable high-speed fiber optic connections. This comprehensive solution provides businesses with an efficient means to manage their networks effectively while delivering unparalleled performance. The L2+ Managed Industrial PoE Switch sets the standard for excellence in industrial power over Ethernet switching technology – a true game-changer indeed!

Main Features

- IEEE 802.3af/at/bt PoE+ Standard, without damaging not-PoE devices.
- Advanced PoE management functions : PoE output setting, Smart PoE, PoE scheduling and PoE Budget Management.
- Priority system for PoE Port, it will supply power to the high priority level port first when the power budget is insufficient.
- Full gigabit L2+ management, easy to manage the PoE network by CLI/WebGUI/NMS.
- Build up a redundant PoE network with STP/RSTP/MSTP/ERPSv2.
- RADIUS, IEEE 802.1X, SNMPv3, HTTPs and SSH to enhance network security.
- Bandwidth management prevents unpredictable network status with "Lock Port" to restrict access to authorized MAC addresses.
- QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including Equ, SP, WRR&SP+WRR
- All-aluminum Case, Compact and Fanless Design

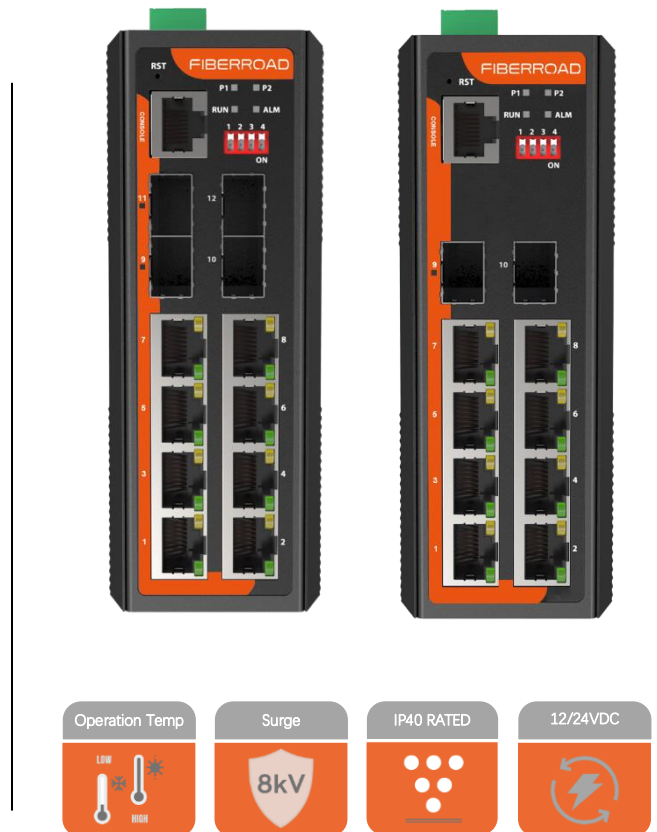

With dual power input design, Fiberroad Managed Industrial PoE Switch can offer redundant mechanisms for critical applications that need always-on connections. It can also operate either at an industrial standard operating temperature range -40 to 75°C. Housed in rugged DIN rail or wall mountable IP40 enclosures, these switches are perfect choices for harsh environments, such as industrial networking, Smart Bus System and are also suitable for many militaries and utility markets applications where environmental conditions exceed commercial product specifications.

Hardware Specifications		
Model	FR-7M3208P/BT	FR-7M3408P/BT
Ports	8x10/100/1000Base-T Ports (RJ45 connector) 2x1000BASE-X SFP	8x10/100/1000Base-T Ports (RJ45 connector) 4x1000BASE-X SFP
Port Mode(Tx)	Auto Negotiation Speed Full/Half Duplex Mode Auto MDI/MDI-X Connection	
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseSX/LX/LHX/ZX IEEE 802.3x for flow control IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1X for authentication IEEE 802.3ad for Port Trunk with LACP	
Console	1x RJ45-to-RS232 Serial Port(115200)	
Packet Buffer Size	4 Mbits	
Maximum Packet Length	Up to 10K	
MAC Address Table	8K	
Transmission Mode	Store and Forward (full/half duplex mode)	
Exchange Property	Delay time: < 7μs Backplane bandwidth: 24Gbps	
IGMP GroupS	2048	
Max. No. of VLAN	64	
VLAN ID Range	VID 1 to 4094	

PoE & Power Supply		
Model	FR-7M3208P/3408P	FR-7M3208BT/3408BT
PoE Ports	Port 1 to 8 IEEE802.3af/at @PoE+	Port 1 to 8 IEEE802.3af/at/bt @PoE++
Power Supply Pin	Default: 1/2(+), 3/6(-)	Default: 1/2(+), 3/6(-) or 4/5(+), 7/8(-)
Max Power Per Port	30W	90W
Total PWR /Input Voltage	240W(DC48-56V) (Model dependent)	480W(DC48-56V) (Model dependent)
Power Consumption	10 Watts Max(without PoE load)	
Power Inputs	2	
Input Voltage	9-56VDC,Redundant dual inputs	
Operating Voltage	Non-PoE Mode: 9-56VDC 30W PoE Mode: 48-56VDC 90W PoE Mode: 52-56VDC(IEEE802.3bt model)	
Connector	1 removable 6-contact terminal blocks Pin 1/2 for Power 1, Pin 3/4 for Power 2, Pin 5/6 for fault alarm	
Protection	Overload Current Protection, Reverse Polarity Protection	

Software Features	
Redundancy Protocols	Support STP/RSTP/MSTP/ERPSv2, Link Aggregation
Multicast Support	Support IGMP Snooping V1/V2/V3, support GMRP, GVMP,802.1Q
VLAN	Support IEEE 802.1Q 4K VLAN, support QINQ, Double VLAN,
Time Management	SNTP
QoS	Flow-based redirection Flow-based rate limiting Flow-based packet filtering 8*Output queues of each port 802.1p/DSCP priority mapping Diff-Serv QoS, Priority Mark/Remark Queue Scheduling Algorithm (SP, WRR, SP+WRR)
ACL	Port-based Issuing ACL ACL based on port and VLAN L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc
POE Management	Total power limit of PoE power supply PoE output power allocation PoE output priority configuration PoE working status Scheduling of PoE operation
Diagnostic Maintenance	Support port mirroring, Syslog, Ping
Management Function	Support CLI, WEB, SNMPv1/v2/v3, Telnet server for management, EEE, LLDP, DHCP Server/Client(IPv4/IPv6), Cloud/MQTT
Alarm Management	Support 1 way relay alarm output, RMON, TRAP
Security	Broadcast Storm Protection, HTTPS/SSLv3, AAA & RADIUS, SSH2.0 Support DHCP Snooping, Option 82, 802.1X security access, Support user hierarchical management, ACL access control list, Support DDOS, port-based MAC filtering / binding, MAC black holes, IP source protection, Port isolation, ARP message speed limit
Advance Layer 2+ Features	IPv4/IPv6 Management Static Route

Physical Characteristics	
Housing	Aluminum case
IP Rating	IP40
Dimensions	138mm x 108mm x 49mm (L x W x H)
Installation	DIN Rail/Wall Mount
Weight	680g
Environmental	
Operating Temperature	-40°C~75°C (-40 to 167 °F)
Operating Humidity	5%~90% (non-condensing)
Storage Temperature	-40°C~85°C (-40 to 185 °F)
MTBF	907,476 hours @ Telcordia SR-332 Standard
Heat Dissipation	34 BTU/h (non-PoE mode) 853 BTU/h (with 240W PoE load)
Cooling	Passive Cooling, Fanless Design
Noise Level	0 dBA

LED	State	Description
PWR (P1&P2)	ON	Power is being supplied
	OFF	Power is not being Supplied.
RUN	Blinking	The system is running well
Link/ACT (1-8)	ON	Port connection is active
	Blinking	Data transmitted
	OFF	Port connection is not active.
ALM	ON	Has alarm information
	OFF	No alarm information

DIP Switch	State	Description
#1	ON	RSTP Disabled
	OFF	RSTP Enable(Default)
#2	ON	Port VLAN Enable
	OFF	Port VLAN Disable(Default)
#3	ON	SFP Port is 100M
	OFF	SFP Port 100/1000M(Default)
#4		Function Reserve

NOTE: 1. RSTP switches to the ON position, which indicates RSTP is in disabled status.
 2. VLAN switches to the ON position, indicating VLAN is enabled. All LAN ports can only communicate with the SFP uplinks when this option is enabled.
 3. To take effect the DIP Switch function while the ethernet switch is in operation, there is a need to reboot the Ethernet switch after tuning the DIP switch.


Regulatory & Warranty

Safety	IEC/EN 62368-1
EMI	EN55032 Class A, CISPR 32 FCC Part 15B Class A
EMS	EN61000-4-2 (ESD) EN61000-4-3 (RS) EN61000-4-4 (EFT) EN61000-4-5 (Surge) EN61000-4-6 (CS) EN61000-4-8 (PFMF)
Shock	IEC 60068-2-27
Free Fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
Environmental	RoHS
Warranty	5 Years, Details See: www.fiberroad.com

Package Contents

Device	1x Industrial Ethernet Switch
Cable	1xDB9 female to RJ45
Installation Kit	1x DIN-Rail Clip 2x Wall-Mount Kits
Documentation	1 x Quick installation guide 1 x Warranty card 1x Product notice

Dimensions Unit: mm

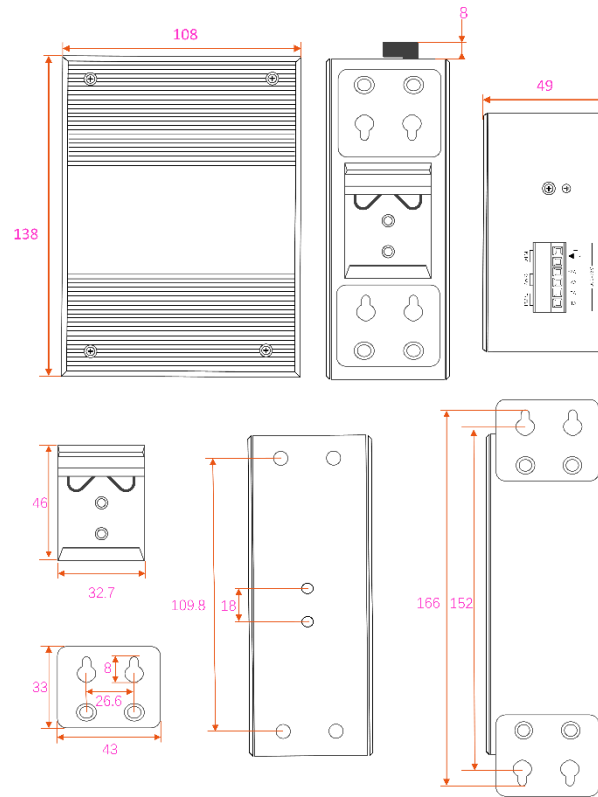

Accessories(Sold Separately)

Power Supply

FR-I-60-24	DIN-rail 24 VDC power supply with 60W/0.6A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-120-48	DIN-rail 48-58V VDC power supply with 120W/1.2A, , 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-240W-48	DIN-rail 48-55V VDC power supply with 240W/2A, , 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-480W-48	DIN-rail 48-55V VDC power supply with 480W/4A, , 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

SFP Optical Transceiver

FRSX-1L311C-I	1.25Gb/s 1310nm 10km SFP, wide operation temperature range of -40°C-85°C (-40°F - 185°F)
FRSX-1L341C-I	1.25Gb/s 1310nm 40km SFP, wide operation temperature range of -40°C-85°C (-40°F - 185°F)
FRSX-1L5X1C-I	1.25Gb/s 1550nm 80/100km SFP, wide operation temperature range of -40°C-85°C (-40°F - 185°F)
FRSX-1L3523/5323C-I	1.25Gb/s 1310nm/1550nm 20km BiDi SFP, wide operation temperature range of -40°C-85°C (-40°F - 185°F)

Armored Fiber Patch Cable / LAN Cable

FRPC-A-LC	Armored LSZH LC UPC to LC UPC Duplex OS2 single mode 7.0mm for Outdoor Application , 1-50m
FRLC-A-CAT6	Armored Cat6 Snagless shielded(SFTP) Ethernet Network Patch Cable, 26AWG, 1000Base-T, 0.5m – 3m

Precautions

To avoid damage to the equipment and personal injury caused by improper use, please observe the following precautions:

- ❖ Keep the power off during installation, wear an anti-static wrist, and ensure that the anti-static wrist is in good contact with the skin to avoid potential safety hazards.
- ❖ The switch can work normally under the correct power supply. Please confirm that the power supply voltage matches the voltage indicated by the switch.
- ❖ Before powering on the switch, please make sure that the power circuit is not overloaded, so as not to affect the normal operation of the switch and even cause unnecessary damage.
- ❖ To avoid the risk of electric shock, do not open the case while the switch is working, even if it is not charged, do not open it yourself.
- ❖ Before cleaning the switch, pull out the power plug of the switch. Do not wipe with a wet cloth. Do not use liquid to clean it.
- ❖ The equipment installed in the rack is generally from bottom to top to avoid overload installation.
- ❖ Avoid placing other heavy objects on the surface of the switch to avoid accidents.

Order Information

Model Number	10/100/1000Base-T(X), RJ45	100/1000Base-FX Port	PoE Standard	Input Voltage	Operating Temp.
FR-7M3208P	8	2	IEEE802.3 af/at Port 1-8	DC9-56V	-40 to +75°C
FR-7M3208BT	8	2	IEEE802.3 af/at/bt Port 1-8	DC9-56V	-40 to +75°C
FR-7M3408P	8	4	IEEE802.3 af/at Port 1-8	DC9-56V	-40 to +75°C
FR-7M3408BT	8	4	IEEE802.3 af/at/bt Port 1-8	DC9-56V	-40 to +75°C

The information in this document is subject to change without notice. Fiberroad Technology Co., Limited has made all effects to ensure the accuracy of the information, but all information in this document does not constitute any kind of warranty. Visit our website for the most up-to-date product information

For more information

For more information about Fiberroad Industrial Ethernet Switch series products, Visit <https://www.fiberroad.com> or contact your local account representative.