




L2+ Managed Ethernet Switches

FR-9M3424 • FR-9M3424P • FR-9M3424BT

Industrial L2+ Managed 24-port 10/100/1000Base-TX (Non-PoE/PoE+/PoE++)  
+ 4-port 10/100/1000Base-TX or 100/1000Base-SFP Combo Ethernet Switch  
with Redundant DC Power Inputs, 1U Rack-mount

Product Data Sheet

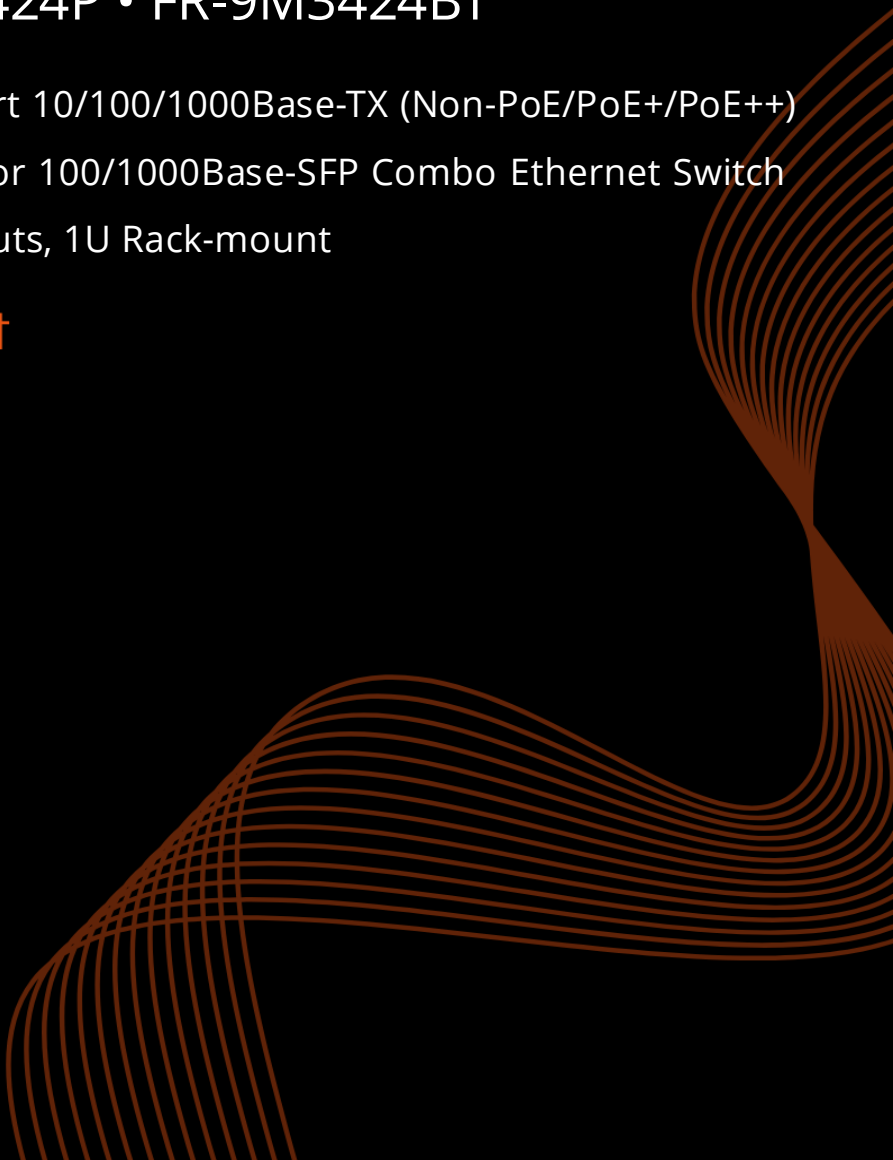

# FR-9M3424 • FR-9M3424P • FR-9M3424BT

## Main Features

- 24x10/100/1000BASE-T Gigabit Ethernet RJ45
- 4x100/1000BASE-X SFP or 10/100/1000BASE-T Combo Ports
- Optionally support IEEE 802.3 af/at/bt Power Over Ethernet Standard
- Full gigabit L2+ management, easy to manage the network by CLI/WebGUI/NMS.
- Build up a redundant industrial network with STP/RSTP/MSTP/ERPSv2
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- Traffic Classification Based on IEEE 802.1p, COS, WRR, and Strict Mode
- SNMPv1/v2c/v3 for different levels of network management
- Wide operating temperature range -40 to 75°C (-40 to 167°F)
- All-aluminum Case, Compact and Fanless Design



## Overview

Experience unparalleled performance with the Layer 2+ Plus Managed Industrial Ethernet Switch, designed specifically for demanding industrial environments. Engineered for exceptional stability and reliability, this switch ensures seamless Ethernet transmission in factories, outdoor settings, and harsh conditions. Its robust construction withstands the rigors of industrial applications while delivering advanced management features that facilitate optimal network control. Elevate your operational efficiency and safeguard your critical data communications with a solution that has consistently proven its mettle across various sectors. Invest in enduring quality—choose the Layer 2+ Plus Managed Industrial Ethernet Switch for your networking needs.

Engineered for reliability in the most demanding industrial environments, the Layer 2+ Plus Managed Industrial Ethernet Switch seamlessly integrates dual power input design to ensure uninterrupted connectivity. Enclosed in a rugged IP40-rated housing that can be easily mounted on DIN rails or walls, it excels in harsh settings where durability and uptime are critical. With its exceptional operating temperature range of -40 to 75°C, this switch is built to withstand extreme conditions.

## Hardware Specifications

Product	FR-9M3424	FR-9M3424P	FR-9M3424BT
Copper Ports	24x10/100/1000BASE-T RJ45 Auto-MDI/MDI-X (Port 1-24)		
Fiber Ports	4x100/1000BASE-X SFP Slots or 10/100/1000BASE-T Combo Ports (Port 25-28)		
Console	1x RJ45-to-RS232 Serial Port(115200)		
Connector	1 removable 5-contact terminal blocks Pin 1/2 for Power 1, Pin 4/5 for Power 2		
RAM	128Mbyte		
FLASH	32MByte		
Reset Button	<5 sec: System Reboot; >10 sec: Factory Default		
Surge Protection	±6kV DC, ±4kV RJ45	±6kV DC, ±6kV RJ45	
Enclosure	IP40 aluminum case		
Installation	Rack Mount		
Dimension	400x300x44mm		
Weight	2600g(Bare weight), 3500g(With package)		

## Switching

Switch Architecture	Store-and-Forward
Switch Fabric	56Gbps/non-blocking
Forwarding Rate	41.66Mpps(64-byte packet size)
Packet Buffer Size	4 Mbits
Maximum Packet Length	10K bytes
MAC Address Table	8K entries, automatic source address learning and aging
Flow Control	IEEE 802.3x pause frame for full duplex, Back pressure for half duplex

## PoE & Power Supply

PoE Ports	\	Port 1 to 24 IEEE802.3 af/at	Port 1 to 24 IEEE802.3af/at/bt
PoE Power Supply Type	\	End-span	End-span
Power Supply Pin	\	1/2(+), 3/6(-)	1/2(+), 3/6(-) or 4/5(+), 7/8(-)
Max Power Per Port	\	30W	90W
Input Voltage	DC9-56V	DC48-56V	DC52-56V
Power Consumption	15 Watts Max (without PoE load)		
PoE Power Budget	\	Max 600W@dual 52VDC inputs	


## Environmental

Operating Temperature	-40°C~75°C (-40 to 167 °F)
Storage Temperature	-40°C~85°C (-40 to 185 °F)
Operating Humidity	5%~95% (non-condensing)
MTBF	907,476 hours @ Telcordia SR-332 Standard
Heat Dissipation	65 BTU/h (non-PoE mode),1054 BTU/h (with 240W PoE load)
Cooling	Passive Cooling, Fanless Design
Noise Level	0 dBA

<b>Software Features</b>	
Port Configuration	Port(Admin Status) disable/enable Copper Port: Auto-negotiation 10/100/1000Mbps full and half duplex mode selection Fiber Port: 100M/1000M speed selection Flow Control disable/enable Power saving(EEE) disable/enable Each port description
Port Status	Display each ports' speed duplex mode, link status, flow control status, auto negotiation status, Fiber Port Information, Port Traffic
Port Mirroring	Source Ingress/ Egress Port/ Both, Many-to-1 monitor
VLAN	Up to 4K VLAN groups, out of 4094 VLAN IDs IEEE 802.1Q tag-based VLAN IEEE 802.1AD Q-in-Q tunneling(Double VLAN) GVRP(Generic VLAN Registration Protocol)
Link Aggregation	IEEE 802.3ad LACP/Static trunk Supports 6 trunk groups with 4 ports per trunk
Spanning Tree Protocol	IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol
Multicast	Dynamic/Static Multicast groups IGMP Snooping v1,2,3 Port-based IGMP Snooping Fast Leave GMP Querier
Rate Limitation	Per Port Rate Limitation Ingress: 16-1000000 kbps/Egress: 16-1000000 kbps
Ring	ITU-T G.8032 ERPS, Recovery time < 10ms
QoS	Traffic classification based, strict priority and WRR 8-level priority for switching -Port number -802.1p priority -802.1Q VLAN tag -DSCP/TOS field in IP Packet
ACL	IP-based ACL/MAC-based ACL ACL based on: -MAC Address -IP Address -Ethertype -Protocol Type -VLAN ID -DSCP -802.1p Priority
Security	Port Security Static MAC address IEEE 802.1x port-based network access control RADIUS authentication DHCP Snooping, DHCP option 82
<b>PoE Management Functions</b>	
PoE System Management	PoE Port status monitoring Total PoE power budget control PoE usage threshold and temperature threshold PoE port Priority PoE mode(PoE/PoE+/PoE++) PD reboot(Zero Traffic Duration)
PoE Schedule	Absolute/Periodic Mode

<b>Software Features</b>		
<b>Layer 3 Functions</b>		
IP Interfaces	Max. 8 VLAN interfaces	
Routing Table	Max.32 routing entries	
Routing	IPv4 software static routing	
<b>Management</b>		
Basic Management Interface	Console; Telnet; Web browser; SNMPv1/v2c	
Secure Management Interface	SSHv2, TLSv1.2, SNMPv3,SNMP MIB	
System Management	Firmware Upgrade by HTTP protocol through Ethernet network Configuration upload/download through HTTP Remote syslog, System log LLDP protocol, SNTp PREVIEW NMS Alarm(Relay, Led, Temperature, Trap, Power)	
<b>LED</b>	<b>State</b>	<b>Description</b>
PWR (P1&P2)	ON	Power is being supplied
	OFF	Power is not being Supplied.
RUN	Blinking	The system is running well
	OFF	The system is running unwell
FAIL(Only For PoE)	ON	PoE Status is abnormal
	OFF	PoE Status is normal
MAX(Only For PoE)	ON	Total PoE Power out of maximum power budget
	OFF	Total PoE Power under maximum power budget
R.O.	ON	Ring Owner
	OFF	Not Ring Owner
RING	ON	Ring is enabled
	OFF	Ring is disabled
Link/ACT (1-28)	ON	Port connection is active
	Blinking	Data transmitted
	OFF	Port connection is not active.
RJ45 Port Speed	ON	1000M is running
	OFF	No 1000M is running
ALM	ON	Has alarm information
	OFF	No alarm information
<b>Regulatory &amp; Warranty</b>		
ISO	Manufactured in ISO-9001 facility	
Safety	IEC62368-1:2020+A11:2020	
EMI	FCC Part 15B Class A, IEC 61000-3-2	
EMS	IEC61000-4-2 ESD: Contact:±8kV, Air:±15kV IEC61000-4-5 Surge: Power: ±6kV; RJ45:±4kV/±6kV(PoE)	
Shock	IEC 60068-2-27	
Free Fall	IEC 60068-2-32	
Vibration	IEC 60068-2-6	
Environmental	RoHS 2011/65/EU Annex II(EU)	
Warranty	5 Years, Details See: <a href="https://fiberroad.com/warranty">https://fiberroad.com/warranty</a>	
<b>Package Contents</b>		
Device	1 x Industrial Ethernet Switch	
Cable	1 x DB9 female to RJ45	
Installation Kit	2 x Rack-mounting Kits	
Documentation	1 x Quick installation guide 1 x Warranty card	

**Dimensions Unit: mm**

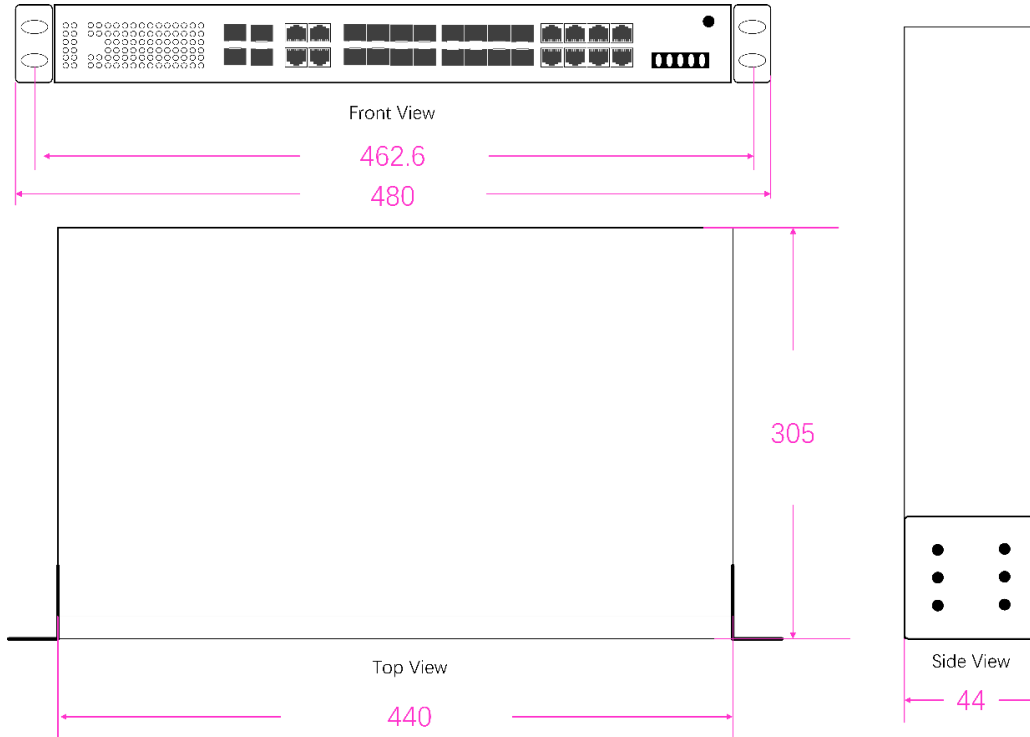

**Ordering Information**

Available Model	Description	Input Voltage	Operating Temp.
FR-9M3424	Industrial L2+ Managed 24-port 10/100/1000Base-TX + 4-port 10/100/1000Base-TX or 100/1000Base-SFP Combo Ethernet Switch with Redundant DC Power Inputs, 1U Rack-mount	Dual DC9-56V	-40 to +75°C
FR-9M3424P	Industrial L2+ Managed 24-port 10/100/1000Base-TX (PoE+) + 4-port 10/100/1000Base-TX or 100/1000Base-SFP Combo Ethernet Switch with Redundant DC Power Inputs, 1U Rack-mount	Dual DC9-56V	-40 to +75°C
FR-9M3424BT	Industrial L2+ Managed 24-port 10/100/1000Base-TX (PoE++) + 4-port 10/100/1000Base-TX or 100/1000Base-SFP Combo Ethernet Switch with Redundant DC Power Inputs, 1U Rack-mount	Dual DC9-56V	-40 to +75°C

**Optional Accessories (to be purchased separately)**

**Power Supply**

FR-I-60-24	DIN-rail 24 VDC power supply with 60W/0.6A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-120-48	DIN-rail 48-58V VDC power supply with 120W/1.2A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-240W-48	DIN-rail 48-55V VDC power supply with 240W/2A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-480W-48	DIN-rail 48-55V VDC power supply with 480W/4A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

**SFP Optical Transceiver**

(S)=SFP Option

Please select your SFP on our SFP Modules page for details.

**Armored Fiber Patch Cable / LAN Cable**

FRPC-A-LC

Armored LSZH LC UPC to LC UPC Duplex OS2 single mode 7.0mm for Outdoor Application , 1-50m

FRLC-A-CAT6

Armored Cat6 Snagless shielded(S/FTP) Ethernet Network Patch Cable, 26AWG, 1000Base-T, 0.5m – 3m

**Shipping**

Model No.	FR-9M3424	FR-9M3424P/FR-9M3424BT
Classification Codes	HS Code: 851762	
	HTS: 8517.62.00	
NDA Compliant	Yes	
Individual Gross Weight	3.5kg	3.98kg
Individual Package Dimension	495x393x80mm	
Package Quantity	4 Units	
Package Gross Weight	15kg	17kg
Package Dimension	520x345x418mm	

**Precautions**

To prevent equipment damage or personal injury caused by improper operation, please observe the following precautions:

- ❖ Turn off the power before installation. Wear an anti-static wrist strap and ensure proper skin contact to prevent electrostatic discharge (ESD) damage.
- ❖ Ensure the power supply voltage matches the voltage specified on the switch.
- ❖ Before powering on the switch, verify that the power circuit is not overloaded to avoid abnormal operation or equipment damage.
- ❖ Do not open the chassis while the switch is operating. To avoid the risk of electric shock, do not disassemble the device.
- ❖ Disconnect the power before cleaning. Do not use a wet cloth or liquid cleaners.
- ❖ When installing in a rack, mount equipment from bottom to top to prevent overloading.
- ❖ Do not place heavy objects on the switch.

Specifications are subject to change without notice. Fiberroad Technology Co., Ltd. makes no warranties, either expressed or implied, regarding the information contained herein. Please contact us for the latest product information.