



Unmanaged Ethernet Switches

FR-7N3224 • FR-7N3224P • FR-7N3224BT

Industrial Unmanaged 24-port 10/100/1000Base-TX (Non-PoE/PoE+/PoE++)  
+ 2-port 1000Base-SFP Ethernet Switch with Redundant DC Power Inputs

Product Data Sheet



## FR-7N3224 • FR-7N3224P • FR-7N3224BT



### Main Features

- 24 x 10/100/1000Base-T RJ45 Ports
- 2 x 1000BASE-X SFP Slots
- Optionally support IEEE 802.3 af/at/bt Power Over Ethernet Standard
- Supports IEEE 802.3x flow control for Full Duplex mode and backpressure for Half Duplex mode
- Non-blocking switching architecture that forwards and filters packets at full wire-speed for maximum throughput
- Auto-MDI/MDIX eliminates the need for crossover cables
- Supports MAC address auto-learning and auto-aging
- Auto-negotiation ports provide smart integration between 10Mbps, 100Mbps and 1000Mbps hardware.
- IEEE 802.1Q VLAN Transparency
- Plug and Play design simplifies installation.

### Industrial Case and Installation

- IP40 Aluminium case, Fanless design
- 9-56V DC redundant power with reverse polarity protection
- DIN-rail and wall mount installation
- -40 to +75°C operating temperature

### Overview

The Fiberroad 7N Series Unmanaged Industrial Ethernet Switch stands out as a robust and budget-friendly solution specifically designed for the demanding environments of outdoor space CCTV cameras and diverse industrial networking requirements. Engineered to withstand harsh weather conditions, this unmanaged industrial Ethernet switch offers seamless connectivity, ensuring that surveillance systems operate flawlessly even in challenging settings. Its optional support for IEEE 802.3 af/at/bt Power Over Ethernet Standard further enhances its versatility by allowing power delivery along with data transmission through the same cable, simplifying installations and reducing clutter. With multiple ports available for quick integration into existing networks, this unmanaged industrial Ethernet switch provides reliable performance while keeping operational costs low—a perfect match for industries looking to enhance their network infrastructure without compromising on quality or efficiency.

<b>Hardware Specifications</b>			
Product	FR-7N3224	FR-7N3224P	FR-7N3224BT
Copper Ports	24x10/100/1000BASE-T RJ45 Auto-MDI/MDI-X (Port 1-24)		
Fiber Ports	2x1000BASE-X SFP Slot (Port 25 -26)		
Enclosure	IP40 aluminum case		
Installation	DIN-Rail and Wall-mount		
Dimension	155x128x88mm		
Weight	1500g(Bare weight), 1800g(With package)		
Surge Protection	±6kV DC, ±4kV RJ45	±6kV DC, ±6kV RJ45	
<b>Switching</b>			
Switch Architecture	Store-and-Forward		
Switch Fabric	52Gbps/non-blocking		
Forwarding Rate	38.69 Mpps(64-byte packet size)		
Packet Buffer Size	4Mbits		
MAX. Packet Length	1500 bytes		
MAC Address Table	8K entries, automatic source address learning and aging		
Flow Control	IEEE 802.3x pause frame for full duplex, Back pressure for half duplex		
<b>Power Supply and PoE</b>			
Power Input	2		
Power Connector	1 removable 6-contact terminal blocks Pin 1/2 for Power 1, Pin 3/4 for Power 2, Pin 5/6 for fault alarm(As required)		
Operating Voltage	DC9-56V	DC48-56V	DC52-56V
Power Consumption	12 Watts Max (without PoE load)		
Protection	Reverse Polarity, Overload Current		
PoE Ports	\	Port 1 to 24 IEEE802.3 af/at	Port 1 to 24 IEEE802.3 af/at/bt
PoE Power Supply Type	\	End-span	End-span
Power Supply Pin	\	1/2(+), 3/6(-)	1/2(+), 3/6(-) or 4/5(+), 7/8(-)
Max Power Per Port	\	30W	90W
PoE Power Budget	\	Max 600W@dual 52VDC inputs	Max 600W@dual 52VDC inputs
<b>Environmental</b>			
Operating Temperature	-40°C to +75°C (-40 to 167 °F)		
Storage Temperature	-40°C to +85°C (-40 to 185 °F)		
Operating Humidity	5%~95% (non-condensing)		
Cooling	Passive Cooling		
MTBF	>500,000 hours @Telcordia SR-332 GB 50° C		
<b>LED Indicators</b>			
P1 & P2	ON: Power is being supplied ,OFF: Power is not being supplied		
Fiber Port	ON: Port connection is active, Blinking: Data transmitted, OFF: Port connection is not active		
RJ45 Port Amber LEDs	ON: Port connection is active, Blinking: Data transmitted, OFF: Port connection is not active		
RJ45 Port Green LEDs	ON: Port is operating at 1000 Mb/s, OFF: Port is operating at 10/100 Mb/s		

DIP Switch	Name	Status	Description
#1	AI VLAN	OFF	Disable
		ON	Enable
#2	AI Extend	OFF	Disable
		ON	Enable
#3	AI QoS	OFF	Disable
		ON	Enable
#4	AI PoE	OFF	Disable
		ON	Enable

- ❖ AI PoE: The AI PoE feature allows the switch to check the ports for activity periodically. If a port is not passing traffic for a certain amount of time, the switch will reset power on that specific port.
- ❖ AI QoS: When AI QoS is enabled on the 4 and 8 port models, all ports will prioritise Video and VoIP traffic flows over others.
- ❖ AI VLAN: AI VLAN is essentially port isolation on each of the RJ45 ports. All ports are only able to communicate with the SFP Port when this option is enabled.
- ❖ AI Extend: AI extend is a common ethernet switch feature designed to extend LAN transmission distance up to 250m. The downside is that port speeds will be limited to only 10Mbps.

## Regulatory & Warranty


Standard Compliance	IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet
ISO	Manufactured in ISO-9001 facility
Safety	IEC62368-1:2020+A11:2020
EMI	FCC Part 15B Class A, IEC 61000-3-2
EMS	IEC61000-4-2 ESD: Contact:±8kV, Air:±15kV IEC61000-4-5 Surge: Power: ±6kV; RJ45:±4kV/±6kV(PoE)
Shock	IEC 60068-2-27
Free Fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
Environmental	RoHS 2011/65/EU Annex II(EU)
Warranty	5 Years, Details See: <a href="https://fiberroad.com/warranty">https://fiberroad.com/warranty</a>

## Package Contents

Device	1 x Industrial Ethernet Switch
Installation Kit	1 x DIN-Rail Clip
Documentation	1 x Quick installation guide 1 x Warranty card

## Dimensions

Unit: mm

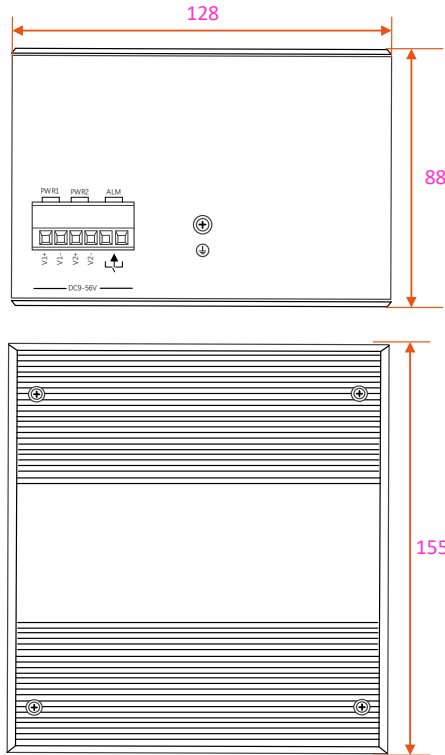

## Ordering Information

Available Model	Description	Input Voltage	Operating Temp.
FR-7M3224	Industrial Unmanaged 24-port 10/100/1000Base-TX + 2-port 1000Base-SFP Ethernet Switch with Redundant DC Power Inputs	Dual DC9-56V	-40 to +75°C
FR-7M3224P	Industrial Unmanaged 24-port 10/100/1000Base-TX (PoE+) + 2-port 1000Base-SFP Ethernet Switch with Redundant DC Power Inputs	Dual DC9-56V	-40 to +75°C
FR-7M3224BT	Industrial Unmanaged 24-port 10/100/1000Base-TX (PoE++) + 2-port 1000Base-SFP Ethernet Switch with Redundant DC Power Inputs	Dual DC9-56V	-40 to +75°C

## Optional Accessories (to be purchased separately)

Power Supply	
FR-I-60-24	DIN-rail 24 VDC power supply with 60W/0.6A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-120-48	DIN-rail 48-58V VDC power supply with 120W/1.2A, , 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-240W-48	DIN-rail 48-55V VDC power supply with 240W/2A, , 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
FR-I-480W-48	DIN-rail 48-55V VDC power supply with 480W/4A, , 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

## SFP Optical Transceiver

(S)=SFP Option Please select your SFP on our SFP Modules page for details.

## Armored Fiber Patch Cable / LAN Cable

FRPC-A-LC Armored LSZH LC UPC to LC UPC Duplex OS2 single mode 7.0mm for Outdoor Application , 1-50m

FRLC-A-CAT6 Armored Cat6 Snagless shielded(SFTP) Ethernet Network Patch Cable, 26AWG, 1000Base-T, 0.5m – 3m

## Shipping

Model No.	FR-7N3224	FR-7N3224P	FR-7N3224BT
Classification Codes	HS Code: 851762		
	HTS: 8517.62.00		
NDA Compliant	Yes		
Individual Gross Weight	1500g	1800g	
Individual Package Dimension	225x200x110mm		
Package Quantity	14 Units		
Package Gross Weight	22kg	26.2kg	
Package Dimension	535x345x470mm		

## Precautions

To prevent equipment damage or personal injury caused by improper operation, please observe the following precautions:

- ❖ Turn off the power before installation. Wear an anti-static wrist strap and ensure proper skin contact to prevent electrostatic discharge (ESD) damage.
- ❖ Ensure the power supply voltage matches the voltage specified on the switch.
- ❖ Before powering on the switch, verify that the power circuit is not overloaded to avoid abnormal operation or equipment damage.
- ❖ Do not open the chassis while the switch is operating. To avoid the risk of electric shock, do not disassemble the device.
- ❖ Disconnect the power before cleaning. Do not use a wet cloth or liquid cleaners.
- ❖ When installing in a rack, mount equipment from bottom to top to prevent overloading.
- ❖ Do not place heavy objects on the switch.

Specifications are subject to change without notice. Fiberroad Technology Co., Ltd. makes no warranties, either expressed or implied, regarding the information contained herein. Please contact us for the latest product information.